



Rainier [RC] Static White



RECESSED




For use with Light Source.

SPECIFICATIONS

Output Options	100lm/ft	300lm/ft	500lm/ft	750lm/ft
Watts per Foot (White Lens)	1.7W	4.0W	8.5W	11.6W
Max Run Length (White Lens)	36ft	20ft	10ft	9ft
Light Color (CCT)	2700K	3000K	3500K	4000K
Color Rendering	95+ CRI, 2-Step			
Lenses	White Flush Lens, White Lens + Linear Louver, White Lens + Hex Louver			
Mounting	Spring Clip			
Finish	Black			
Input Voltage	24VDC (Power Supply: 120VAC - 277VAC)			
Dimming	TRIAC, ELV, 0-10V, DMX, DALI, Bluetooth			
Dimensions	0.87" (22mm) × 0.53" (13.5mm)			
Production Interval	1.31" (33.3mm)			
Operating Temperature	-4°F (-20°C) to 113°F (45°C)			

FIXTURE DIMENSIONS

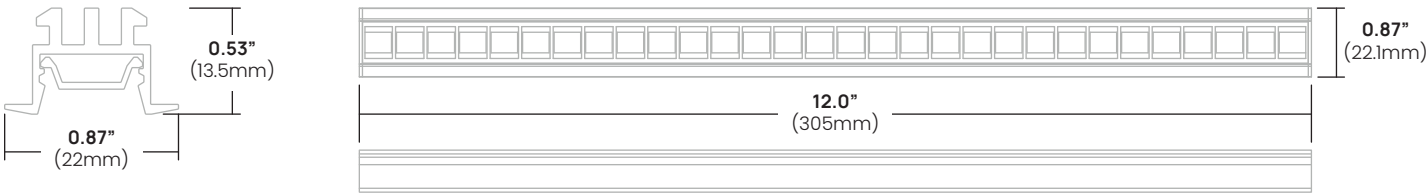

PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____



Rainier [RC] Static White

RECESSED




WHITE LENS DELIVERED LM/FT


	2700K	3000K	3500K	4000K
100 Output	127	137	164	146
300 Output	297	323	384	342
500 Output	573	597	651	645
750 Output	854	889	970	960

ACCESSORIES DIMENSIONS

Spring Clips



Louvers



PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____



Rainier [RC] Static White

RECESSED



PART NUMBER EXAMPLE

ILL-RA02-SW - I - 27K - 100 - WH - SG - BK - 50" - E2 - C
+
PS - UNIV - 24V - 100W - JBOX

PART NUMBER BUILDER

SERIES	DRY/WET	CCT	OUTPUT	LENS	MOUNTING	FINISH
ILL-RA02-SW	-	-	-	-	SG	BK
ilLuminate Rainier [RC] Static White	I - Indoor O - Outdoor	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	100 - 100lm/ft 300 - 300lm/ft 500 - 500lm/ft 750 - 750lm/ft	WH - White Lens WL - White Lens + Linear Louver WX - White Lens + Hex Louver	SG - Spring Clip	BK - Black
LENGTH (IN)		START FEED		END FEED		
		TYPE	LENGTH	TYPE	LENGTH	
Fixtures will be built as close to the requested length without going over based on 1.31in (33.3mm) production interval. Lengths longer than 78in will consist of multiple pieces of channel and lens to be assembled in the field to create the complete fixture length.		E - End	Blank - Endcap	E - End	Blank - Endcap	
		L - Left	2 - 2ft	L - Left	2 - 2ft	
		R - Right	5 - 5ft	R - Right	5 - 5ft	
		B - Back	10 - 10ft	B - Back	10 - 10ft	
		C - Endcap	15 - 15ft	C - Endcap	15 - 15ft	
			20 - 20ft		20 - 20ft	
			25 - 25ft		25 - 25ft	
			30 - 30ft		30 - 30ft	

POWER SUPPLY

SERIES	CONTROL	VOLTAGE OUTPUT	MAX WATTAGE OUTPUT	FORM
PS	-	24V	-	-
ilLuminate AC to DC Constant Voltage Power Supply	UNIV - Universal 5-in-1 DMX - DMX512 Enabled DALI - DALI-2 Enabled BLE - Bluetooth Enabled	24V - 24VDC	30W - 30W 60W - 60W 100W - 100W 200W - 100W x 2 300W - 100W x 3	JBOX - Dry/Damp Rated IP66 - Wet Rated

PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____