



Rainier [SF] Full Spectrum

SURFACE / SUSPENSION




For use with Light Source.

SPECIFICATIONS

Output Options	100lm/ft
Watts per Foot (White Lens)	8W (All On)
Max Run Length (White Lens)	16.4ft
Light Color (CCT)	RGB + 1800K + 4000K
Color Rendering	W = 90+ CRI / 3-Step
Lenses	White Flush Lens, White Lens + Linear Louver, White Lens + Hex Louver
Mounting	Clip, Magnet, Suspension
Finish	Black
Input Voltage	24VDC (Power Supply: 120VAC - 277VAC)
Dimming	PWM, DMX, DALI, Bluetooth
Dimensions	0.59" (15mm) × 0.59" (15mm)
Production Interval	4.00" (101.6mm)
Operating Temperature	-4°F (-20°C) to 113°F (45°C)

FIXTURE DIMENSIONS

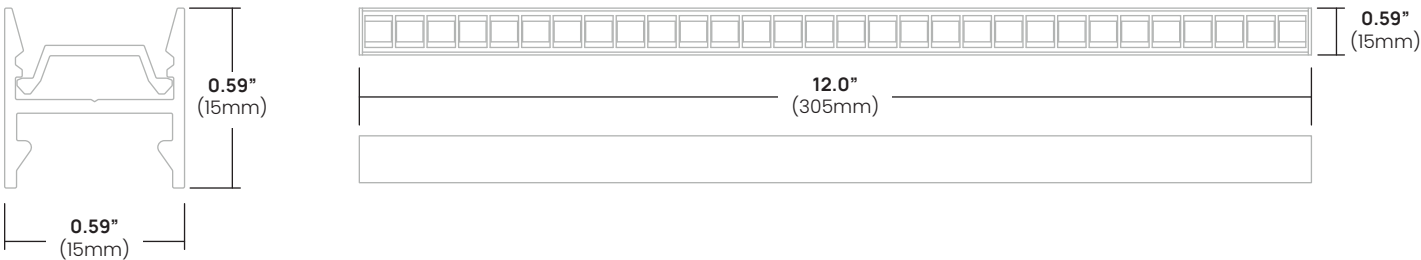

PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____



Rainier [SF] Full Spectrum

SURFACE / SUSPENSION




WHITE LENS DELIVERED LM/FT


	Red	Green	Blue	1800K	4000K
100 Output	34	48	23	120	120

ACCESSORIES DIMENSIONS


Mounting Clips



Magnet Mounting

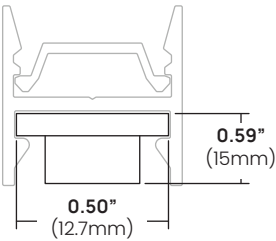

Louvers



PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____



Rainier [SF] Full Spectrum

SURFACE / SUSPENSION



PART NUMBER EXAMPLE

ILL-RA01-FS - I - RGB1840K - 100 - WH - MC - BK - 50" - E2 - C
+
PS - UNIV - 24V - 100W - JBOX

PART NUMBER BUILDER

SERIES	DRY/WET	CCT	OUTPUT	LENS	MOUNTING	FINISH
ILL-RA01-FS	I	RGB1840K	100			BK
iLuminate Rainier [SF] Full Spectrum	I — Indoor	RGB1840K	100 — 100lm/ft	WH — White Lens WL — White Lens + Linear Louver WX — White Lens + Hex Louver	MC — Mounting Clip MG — Magnet SP — Suspension	BK — Black

LENGTH (IN)	START FEED		END FEED	
	TYPE	LENGTH	TYPE	LENGTH
Fixtures will be built as close to the requested length without going over based on 1.31in (33.3mm) production interval.	E — End	Blank — Endcap	E — End	Blank — Endcap
	L — Left	2 — 2ft	L — Left	2 — 2ft
Lengths longer than 78in will consist of multiple pieces of channel and lens to be assembled in the field to create the complete fixture length.	R — Right	5 — 5ft	R — Right	5 — 5ft
	B — Back	10 — 10ft	B — Back	10 — 10ft
	C — Endcap	15 — 15ft	C — Endcap	15 — 15ft
		20 — 20ft		20 — 20ft
		25 — 25ft		25 — 25ft
		30 — 30ft		30 — 30ft

POWER SUPPLY

SERIES	CONTROL	VOLTAGE OUTPUT	MAX WATTAGE OUTPUT	FORM
PS		24V		
iLuminate AC to DC Constant Voltage Power Supply	UNIV — Universal 5-in-1 DMX — DMX512 Enabled DALI — DALI-2 Enabled BLE — Bluetooth Enabled	24V — 24VDC	30W — 30W 60W — 60W 100W — 100W 200W — 100W × 2 300W — 100W × 3	JBOX — Dry/Damp Rated IP66 — Wet Rated

PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____