



Rainier [SF] Tunable White

SURFACE / SUSPENDED




For use with Light Source.

SPECIFICATIONS

Output Options	100lm/ft		
Watts per Foot (White Lens)	4.4W (All On)		
Max Run Length (White Lens)	16.4ft		
Light Color (CCT)	1800K – 3000K	1800K – 3500K	1800K – 4000K
Color Rendering	95+ CRI / 3-Step		
Lenses	White Flush Lens, White Lens + Linear Louver, White Lens + Hex Louver		
Mounting	Clip, Magnet, Suspension		
Finish	Black		
Input Voltage	24VDC (Power Supply: 120VAC – 277VAC)		
Dimming	PWM, DMX, DALI, Bluetooth		
Dimensions	0.59" (15mm) × 0.59" (15mm)		
Production Interval	1.31" (33.3mm)		
Operating Temperature	-4°F (-20°C) to 113°F (45°C)		

FIXTURE DIMENSIONS

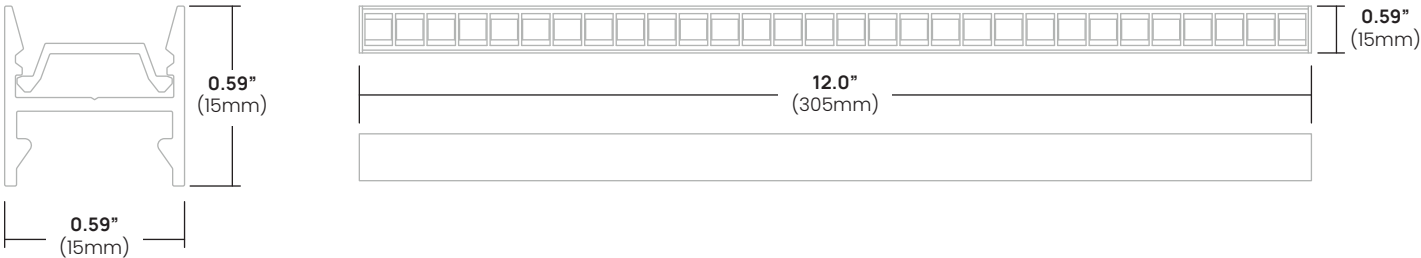

PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____



Rainier [SF] Tunable White


SURFACE / SUSPENDED




WHITE LENS DELIVERED LM/FT				
	1800K	3000K	3500K	4000K
100 Output	116	160	163	166

ACCESSORIES DIMENSIONS


Mounting Clips

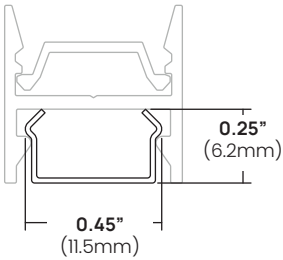

Magnet Mounting



Louvers



PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____



Rainier [SF] Tunable White

SURFACE / SUSPENDED



PART NUMBER EXAMPLE

ILL-RA01-TW - I - 1830K - 100 - WH - MC - BK - 50" - E2 - C
+
PS - UNIV - 24V - 100W - JBOX

PART NUMBER BUILDER

SERIES	DRY/WET	CCT	OUTPUT	LENS	MOUNTING	FINISH
ILL-RA01-TW			100			BK
iLuminate Rainier [SF] Tunable White	I — Indoor	1830K — 1800K - 3000K	100 — 100lm/ft	WH — White Lens	MC — Mounting Clip	BK — Black
	O — Outdoor	1835K — 1800K - 3500K		WL — White Lens + Linear Louver	MG — Magnet	
		1840K — 1800K - 4000K		WX — White Lens + Hex Louver	SP — Suspension	
LENGTH (IN)		START FEED		END FEED		
	TYPE	LENGTH	TYPE	LENGTH		
<i>Fixtures will be built as close to the requested length without going over based on 1.31in (33.3mm) production interval.</i>						
<i>Lengths longer than 78in will consist of multiple pieces of channel and lens to be assembled in the field to create the complete fixture length.</i>						
	E — End	Blank — Endcap	E — End	Blank — Endcap		
	L — Left	2 — 2ft	L — Left	2 — 2ft		
	R — Right	5 — 5ft	R — Right	5 — 5ft		
	B — Back	10 — 10ft	B — Back	10 — 10ft		
	C — Endcap	15 — 15ft	C — Endcap	15 — 15ft		
		20 — 20ft		20 — 20ft		
		25 — 25ft		25 — 25ft		
		30 — 30ft		30 — 30ft		

POWER SUPPLY

SERIES	CONTROL	VOLTAGE OUTPUT	MAX WATTAGE OUTPUT	FORM
PS -	-	24V -	-	-
iLuminate AC to DC Constant Voltage Power Supply	UNIV - Universal 5-in-1 DMX - DMX512 Enabled DALI - DALI-2 Enabled BLE - Bluetooth Enabled	24V - 24VDC	30W - 30W 60W - 60W 100W - 100W 200W - 100W x 2 300W - 100W x 3	JBOX - Dry/Damp Rated IP66 - Wet Rated

PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____